

Официальный дилер

BEL-DOZER

SHANTUI
VALUE THAT WORKS

Internal Combustion Forklift

1.5t/1.8t/2.0t/2.5t/3.0t/3.5t


Dseries

ООО «ТПК Белдозер»:

тел./факс: +375 17 555-33-33;
моб. т.: +375 25 770-10-70;
e-mail: info@beldozer.by
Сайт: SHANTUI.BY


Сервисный центр:

Минский р-н, р-н пос. Колодищи,
тел.: +375 17 285 74 33 (66, 99);
Факс: +375 17 517-00-37

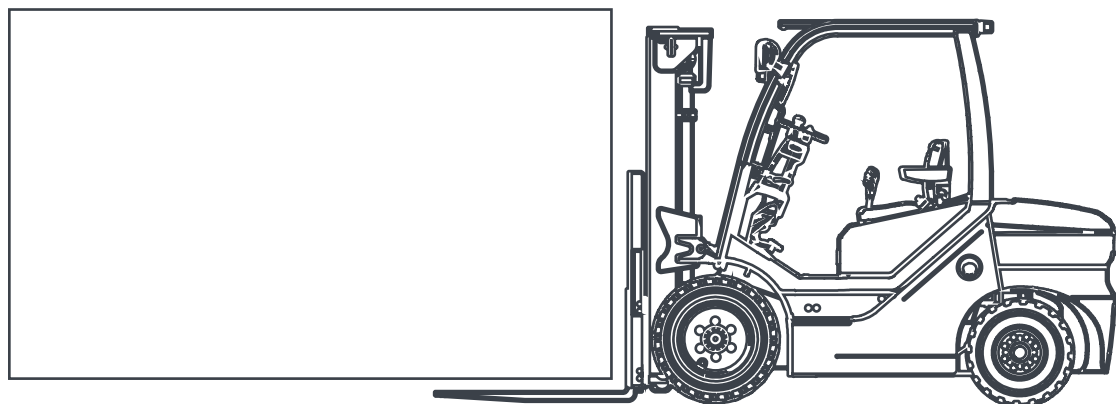



ROBUST

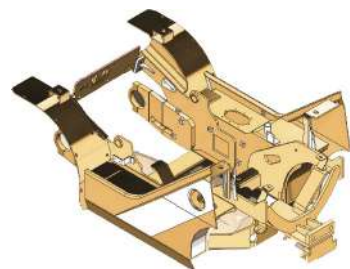

Standard chassis



Multiple engines with high efficiency

Baoli offers a wide range of engine options, which is available for various applications and customer needs.



KION transmission

Automatic Transmission is customized into KION standard, for use in more intense applications.

** De-coupled transmission is also available for D+ forklifts.*

VERSATILITY



Engineering sweeping forklift



Anti-corrosion forklift



Forklift with cabin

Remark: This leaflet is applicable for D series forklifts ranging from 1.5t to 3.5t, including both D basic and D plus.

Remark: For more options of the models and attachments, please contact with your local sales office for details.

ERGONOMIC



Cushion Gasket

There are 4 rubber dampers between cabin and chassis, vibration is minimized.



Engine Bonnet Insulation

Engine bonnet insulation to further reduce noise, the noise level is in conformity with CE and UL standard.



Side Operation Lever


European style Side Control



Low-torque small steering wheel

Low torque steering unit & small steering wheel is applied to reduce the operator fatigue.

SERVICE FRIENDLY

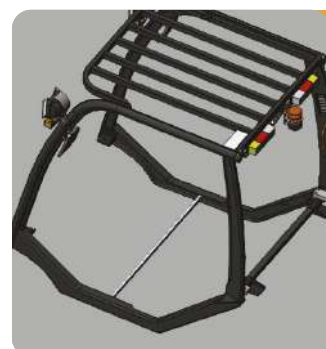

Suspension Cabin

Removable suspension cabin for easy overhaul repairing.



Engine Bonnet

External bonnet friendly, and ensures a 90 Degree opening angle.



Control Box

Integrated control box providing reliable electric system and easy diagnose.



Holes on the F double front tyres

Specially designed front fender with holes for from single tyres into dual tyres

ACTIVE SAFETY



Overhead Guard

Easy in visibility.



Down-curved counterweight & Structure painting

With lowest gravity center and widest rear view among its kind; and KION standard structure painting helps to improve safety and is easy to touch-up



Soft landing mast

Buffering cylinder is easier to handle fragile.



Rear Grip

Convenient and safe for operator to reverse the truck;

* D+ forklifts:

It's a comfortable rubber rear-handrail integrated with a horn button.

UNIQUE FEATURES FOR D+



Operation Platform

Operator friendly interface and fully plastic covered, with LCD display and large space in leg room



Electronic Directional Switch

Power shift improving the operation efficiency.




Ergonomic releasing switch

Easy for foot-parking





Overhead guard

Shock-Resistant PC rain-proof & easy in visibility and use in all weather conditions

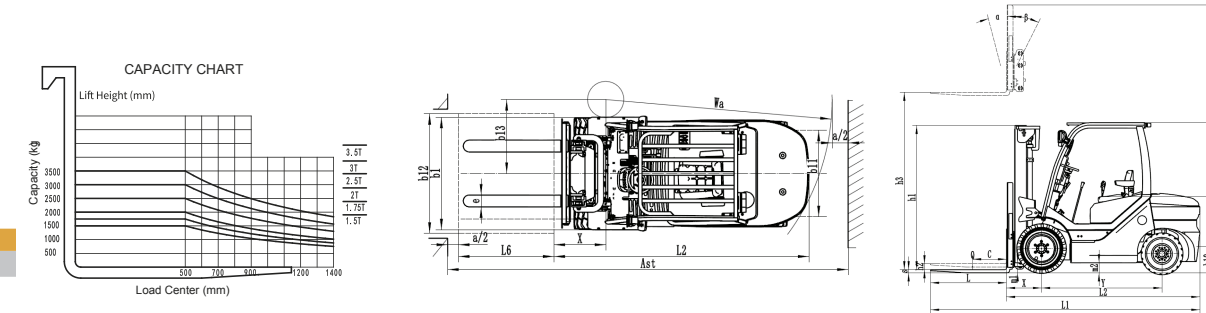

SPECIFICATIONS

		ITEM DESCRIPTION	UNIT	DESIGNALUE											
				SFD15	SFD15	SFD18	SFD18	SFD20	SFD20	SFD25	SFD25	SFD25	SFD25	SFD25	SFD25
Specication	1.3	PowertypeElectric-Diesel-Petrol-LPG-NEPower(Electric)		diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel
	1.4	OperatiTypeHand-stamh-Driveseated		Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated
	1.5	LoadCapacity	Q(Kg)	1500	1500	1800	1800	2000	2000	2500	2500	2500	2500	2500	2500
	1.6	LoadBarycentDistance	C(mm)	500	500	500	500	500	500	500	500	500	500	500	500
	1.8	Axlcentrefoforkface	X(mm)	435	435	435	435	435	435	484	484	484	484	484	484
	1.9	WheelBase	Y(mm)	1500	1500	1500	1500	1500	1500	1700	1700	1700	1700	1700	1700
Weight	2.1	ServiceWeight	kg	3040	3000	3210	3160	3280	3220	3950	3950	4120	3960	3960	3960
	2.2	Axldloadingaderfront/rear	kg	3840/700	3820/680	4330/680	4220/720	4540/700	4520/660	6340/610	6340/610	6080/680	5980/680	5980/680	5980/680
	2.3	Axldloadingunladefront/rear	kg	1380/1660	1360/1640	1340/1870	1300/1860	1320/1960	1300/1920	1880/2250	1880/2250	1800/2300	1680/2280	1680/2280	1680/2280
wheelsandtyres	3.1	TyresSE-SupeelasticPN-Pneumatic		PN	PN	PN	PN	PN	PN	PN	PN	PN	PN	PN	PN
	3.2	FrontTyreSize		6.50-10-14PR	6.50-10-14PR	6.50-10-14PR	6.50-10-14PR	6.50-10-14PR	6.50-10-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR
	3.3	RearTyreSize		5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	3.6	FrontTrackWidth	b10(mm)	940	940	940	940	940	940	1000	1000	1000	1000	1000	1000
	3.7	RearTrackWidth	b11(mm)	920	920	920	920	920	920	970	970	970	970	970	970
Dimensions andOverallSizes	4.1	Mastlift,forward/backward	(/ad) Gr	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°
	4.2	MasMinimumOverallHeight	h1(mm)	2002	2002	2002	2002	2002	2002	2080	2080	2080	2080	2080	2080
	4.3	Fredift	h2(mm)	128	128	128	128	128	128	140	140	140	140	140	140
	4.4	Liftheight	h3(mm)	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
	4.5	MasMaximumOverallHeight	h4(mm)	4040	4040	4040	4040	4040	4040	4050	4050	4050	4050	4050	4050
	4.7	OverheadGuard Height	h6(mm)	2065	2065	2065	2065	2065	2065	2108	2108	2108	2108	2108	2108
	4.8	SeatHeight	h7(mm)	1010	1010	1010	1010	1010	1010	1085	1085	1085	1085	1085	1085
	4.12	DrawbarHeight	h10(mm)	220	220	220	220	220	220	300	300	300	300	300	300
	4.19	OverallLength	L1(mm)	3282	3282	3316	3316	3490	3490	3730	3730	3730	3730	3730	3730
	4.20'	LengthtoFaceofForks	L2(mm)	2362	2362	2396	2396	2420	2420	2660	2660	2660	2660	2660	2660
	4.21	OverallWidth	b1(mm)	1140	1140	1140	1140	1140	1140	1225	1225	1225	1225	1225	1225
	4.22	ForkArmsDimensions	s/e/l(mm)	35/120/920	35/120/920	35/120/920	35/120/920	40/122/1070	40/122/1070	40/122/1070	40/122/1070	40/122/1070	40/122/1070	40/122/1070	40/122/1070
	4.23	ForkCarriage CompliancewithISO328Class/ForA/B		A	A	A	A	A	A	A	A	A	A	A	A
	4.24	ForkCarriageWidth	b3(mm)	1040	1040	1040	1040	1040	1040	1040	1040	1040	1040	1040	1040
	4.31	GroundClearancebelowMast(laden)	m1(mm)	110	110	110	110	110	110	135	135	135	135	135	135
	4.32	GroundClearanceCentreofWheelbase(laden)	m2(mm)	105	105	105	105	105	105	140	140	140	140	140	140
	4.34.1	Workingislewidthwithpallet1000x1200crossways****	Ast(mm)	3795	3795	3815	3815	3835	3835	4124	4124	4124	4124	4124	4124
	4.34.2	Workingislewidthwithpalle800x1200lengthways****	Ast(mm)	3995	3995	4015	4015	4035	4035	4324	4324	4324	4324	4324	4324
	4.35	TurningRadius	Wa(mm)	2160	2160	2180	2180	2200	2200	2440	2440	2440	2440	2440	2440
	4.36	TurningoinMinimumDistancefrom theTruckCenterline	b13(mm)	601.5	-	601.5	-	601.5	-	810	810	810	810	810	810
Performance	5.1	DriveSpeedladen/unladen	km/h	16/16	13.9/14.4	15/16	13.5/14.4	15/15	13.9/14.4	15/16.2	18.6/19	18.7/19.6	18.5/20	18.5/20	18.5/20
	5.2	LiftingSpeedladen/unladen	mm/s	505/640	380/405	445/650	370/415	385/645	380/385	495/655	435/500	335/465	320/530	320/530	320/530
	5.3	LoweringSpeedladen/unladen	mm/s	375/395	465/505	405/415	445/510	465/450	400/495	485/370	445/475	430/455	475/360	475/360	475/360
	5.5	DrawbarPullTractiveE ort(at2km/h)with/withoutload	KN	11.5/10.7	14.5/8.7	11.5/10.7	14.2/8.2	11.5/10.7	16/8.6	10 15	10 15	19.5/11.8	10 15	10 15	10 15
	5.7	Gradeability(at2km/h)aden/unladen	%	20	20	20	20	20	20	20	20	20	20	20	20
	5.10'	ServiceBrake		Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/hydraulic	Mechanical/Hydraulic	Mechanical/Hydraulic	Mechanical/Hydraulic
Engine	7.1	Engine Manufacturer/EngineType		ISUZU C240	XINCHAI 4N23G31	ISUZU C240	XINCHAI 4N23G31	ISUZU C240	XINCHAI 4N23G31	Mitsubishi S4S	ISUZU C240	Kholer KDI1903TCR	XINCHAI C490BPG	WEICHAI WP3.2	WEICHAI WP3.2CR
		EmissionStandard		EURO 3A	CHINASTAG田	EURO 3A	CHINASTAG田	EURO 3A	CHINASTAG田	EURO 3A	EURO 3A	T4F/EURO 3B	EURO 3A/B/C/ CNII	CHINASTAG田	CHINASTAG田
	7.2	Engine PowercompliancewithISO1585	kW	34.3	30	34.3	30	34.3	30	35.3	34.3	42	36.8-40	36.8	36.8
	7.3	RatedNumberofRevolutions	r/min	2500	2600	2500	2600	2500	2600	2250	2500	2600	2670	2500	2500
	7.4	CylinderNumber/Displacement	cm	4/2369	4/2300	4/2369	4/2300	4/2369	4/2300	4/3331	4/2369	3/1861	4/2670	4/3170	4/3170
	7.9	On-boardVoltage	V	12	12	12	12	12	12	12	12	12	12	12	12
	8.1	DriveControl Type		Electron Hydraulic	Mechanical	Electron Hydraulic	Mechanical	Electron Hydraulic	Mechanical Hydraulic	Electron Hydraulic	Electron Hydraulic	Electron Hydraulic	Mechanical/Hydraulic torque converter		
Others	10.4	Volumeeltank	L/Kg	45/37	45/37	45/37	45/37	45/37	45/37	52/45	52/45	52/45	52/45	52/45	52/45
	10.8	Drawbar,model//Type		Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin

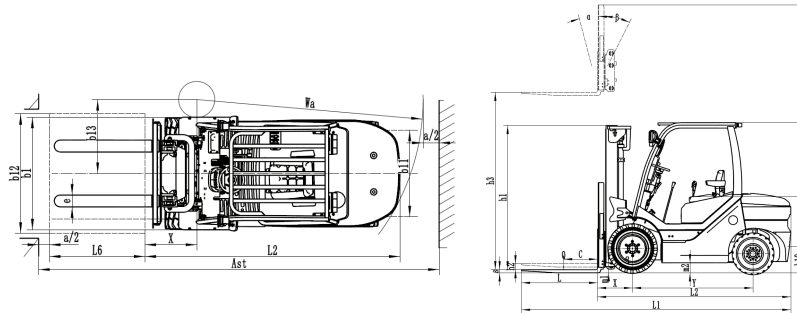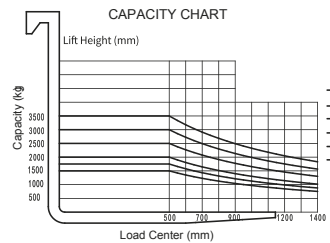


SPECIFICATIONS



		ITEM DESCRIPTION	UNIT	DESIGN VALUE											
				SFD30	SFD30	SFD30	SFD30	SFD30	SFD30	SFD30	SFD35	SFD35	SFD35	SFD35	
Specication	1.3	Power type	Electric-Diesel-Petrol-LPG-NEP (Electric)		diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel	diesel
	1.4	Operation type	Hand-started-Driveseated		Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated	Driveseated
	1.5	Load Capacity	Q(Kg)	3000	3000	3000	3000	3000	3000	3000	3000	3500	3500	3500	3500
	1.6	Load Barycent Distance	C(mm)	500	500	500	500	500	500	500	500	500	500	500	500
	1.8	Axle centre of fork face	X(mm)	484	484	484	484	484	484	484	484	484	484	484	484
	1.9	Wheel Base	Y(mm)	1700	1700	1700	1700	1700	1700	1700	1700	1700	1700	1700	1700
Weight	2.1	Service Weight	kg	4400	4320	4460	4320	4260	4260	4260	4880	4700	4700	4700	4700
	2.2	Axle loading at front/rear	kg	6610/580	6400/860	6420/1000	6400/860	6460/800	6460/800	6460/800	7300/1100	7080/1140	7080/1140	7080/1140	7080/1140
	2.3	Axle loading in load front/rear	kg	1820/2640	1700/2600	1720/2740	1700/2600	1700/2580	1700/2580	1700/2580	1640/3240	1480/3240	1480/3240	1480/3240	1480/3240
Wheels and Tyres	3.1	Tyres	SE-Superelastic-PN-Pneumatic		PN	PN	PN	PN	PN	PN	PN	PN	PN	PN	PN
	3.2	Front Tyre Size		28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR	28x9-15-14PR
	3.3	Rear Tyre Size		6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
	3.6	Front Track Width	b10(mm)	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
	3.7	Rear Track Width	b11(mm)	970	970	970	970	970	970	970	970	970	970	970	970
Dimensions and Overall Sizes	4.1	Mast lift, forward/backward	(/ad) Gr	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°	6°/12°
	4.2	Mast Minimum Overall Height	h1(mm)	2080	2080	2080	2080	2080	2080	2080	2230	2230	2230	2230	2230
	4.3	Free lift	h2(mm)	145	145	145	145	145	145	145	145	145	145	145	145
	4.4	Lift height	h3(mm)	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
	4.5	Mast Maximum Overall Height	h4(mm)	4273	4273	4273	4273	4273	4273	4273	4273	4273	4273	4273	4273
	4.7	Overhead Guard Height	h6(mm)	2108	2090	2090	2090	2108	2108	2108	2108	2108	2108	2108	2108
	4.8	Seat Height	h7(mm)	1070	1070	1070	1070	1070	1070	1070	1085	1085	1085	1085	1085
	4.12	Drawbar Height	h10(mm)	300	300	300	300	300	300	300	300	300	300	300	300
	4.19	Overall Length	L1(mm)	3780	3780	3780	3780	3780	3780	3780	3880	3880	3880	3880	3880
	4.20'	Length to Face of Forks	L2(mm)	2710	2710	2710	2710	2710	2710	2710	2810	2810	2810	2810	2810
	4.21	Overall Width	b1(mm)	1225	1225	1225	1225	1225	1225	1225	1296	1296	1296	1296	1296
	4.22	Fork Arms Dimensions	s/e/l(mm)	45/125/1070	45/125/1070	45/125/1070	45/125/1070	45/125/1070	45/125/1070	45/125/1070	50/125/1070	50/125/1070	50/125/1070	50/125/1070	50/125/1070
	4.23	Fork Carriage Compliance with ISO 2328 Class/ Fork A/B	A	A	A	A	A	A	A	A	A	A	A	A	A
	4.24	Fork Carriage Width	b3(mm)	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100
	4.31	Ground Clearance at Low Mast (laden)	m1(mm)	135	135	135	135	135	135	135	135	135	135	135	135
	4.32	Ground Clearance at Centre of Wheelbase (laden)	m2(mm)	140	140	140	140	140	140	140	140	140	140	140	140
	4.34.1	Working aisle width with pallet 1000x1200 crossways****	Ast(mm)	4144	4144	4144	4144	4144	4144	4144	4224	4224	4224	4224	4224
	4.34.2	Working aisle width with pallet 800x1200 lengthways****	Ast(mm)	4344	4344	4344	4344	4344	4344	4344	4424	4424	4424	4424	4424
	4.35	Turning Radius	Wa(mm)	2460	2460	2460	2460	2460	2460	2460	2540	2540	2540	2540	2540
	4.36	Turning Point Minimum Distance from the Truck Centreline	b13(mm)	810	810	810	810	810	810	810	810	810	810	810	810
Performance	5.1	Drive Speed (laden/unladen)	km/h	16.5/17	18.9/19.5	18.7/19.6	18.5/20	19/20.5	20/20.5	20/20.5	16/17	19/20.5	20/20.5	20/20.5	20/20.5
	5.2	Lifting Speed (laden/unladen)	mm/s	520/595	435/500	435/475	400/430	450/480	480/540	480/540	560/585	450/480	385/440	385/440	385/440
	5.3	Lowering Speed (laden/unladen)	mm/s	475/390	445/475	440/425	450/400	470/430	440/455	440/455	490/395	470/430	475/430	475/430	475/430
	5.5	Drawbar Pull Tractive Effort (at 2km/h) with/without load	KN	10 15	10 15	19.2/13.4	10 15	10 15	16.2/14	16.2/14	10 16	10 17	16.2/14	16.2/14	16.2/14
	5.7	Gradeability (at 2km/h) laden/unladen	%	20	20	20	20	20	20	20	15	15	15	15	15
	5.10'	Service Brake		Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic	Mechanical/ hydraulic
Engine	7.1	Engine Manufacturer/Engine Type		Mitsubishi S4S	ISUZU C240	Kholer KDI1903TCR	XINCHAI C490BPG	XINCHAI 498	WEICHAI WP3.2	WEICHAI WP3.2CR	Mitsubishi S4S	XINCHAI 498	WEICHAI WP3.2	WEICHAI WP3.2CR	WEICHAI WP3.2CR
		Emission Standard		EURO 3A	EURO 3A	T4F/EURO 3B	EURO 3A/BSIII/CNII	CHINASTAG III	CHINASTAG III	CHINASTAG III	EURO 3A	CHINASTAG III	CHINASTAG III	CHINASTAG III	CHINASTAG III
	7.2	Engine Power (compliance with ISO1585)	kW	35.3	34.3	42	36.8-40	45	36.8	36.8	35.3	45	36.8	36.8	36.8
	7.3	Rated Number of Revolutions	r/min	2250	2500	2600	2670	2500	2500	2500	2250	2500	2500	2500	2500
	7.4	Cylinder Number/Displacement	cm	4/3331	4/2369	3/1861	4/2670	4/3168	4/3170	4/3170	4/3331	4/3168	4/3170	4/3170	4/3170
	7.9	On-board Voltage	V	12	12	12	12	12	12	12	12	12	12	12	12
	8.1	Drive Control Type		Electron Hydraulic	Electron Hydraulic	Electron Hydraulic	Mechanical/Hydraulic torque converter				Electron Hydraulic	Mechanical/Hydraulic torque converter			
Others	10.4	Volume of Fuel Tank	L/Kg	52/45	52/45	52/45	52/45	52/45	52/45	52/45	52/45	52/45	52/45	52/45	52/45
	10.8	Drawbar, model/Type	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin	Pin

LOADING CHART

MAST SPECIFICATIONS

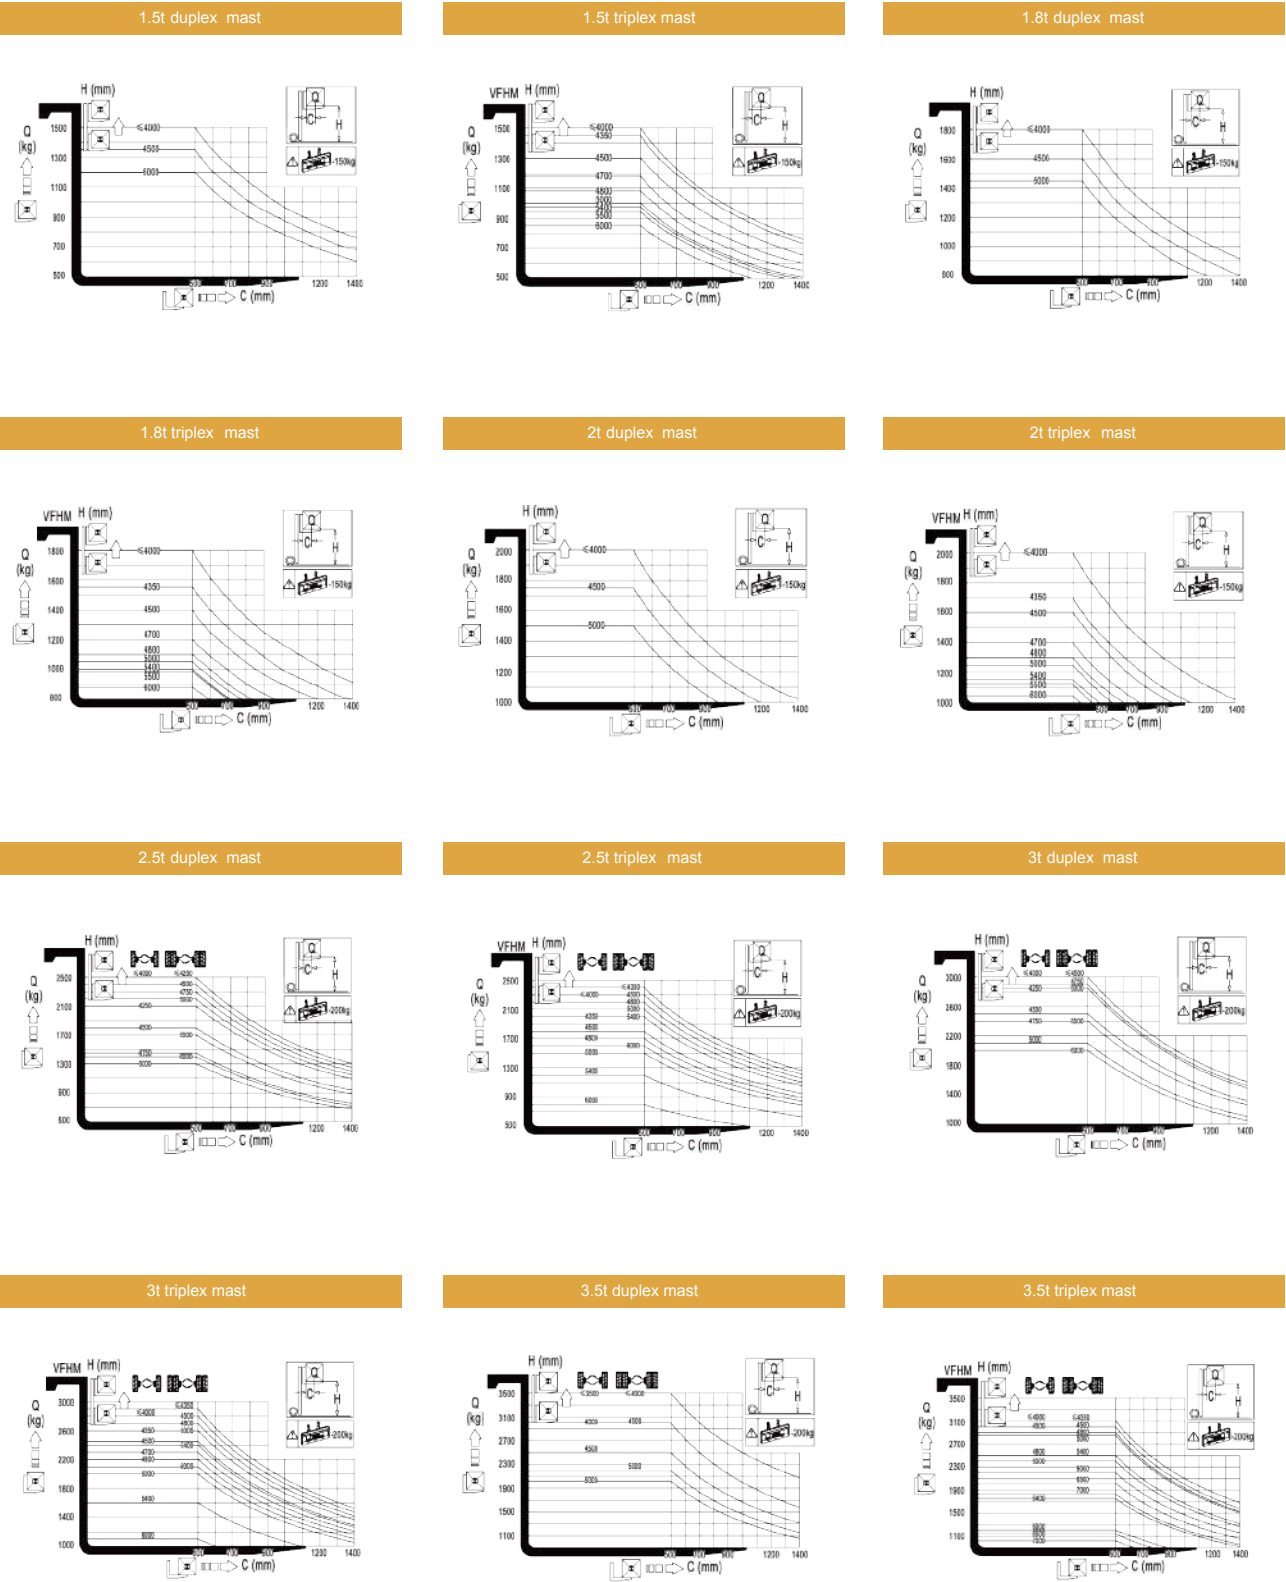

1.5T/1.8T/2.0TMASTSPECIFICATIONS									
		Ratedcapacity			height		free-lifheight		
MastType	Max height	loadcente500mm			closed	heightwith	without	with	masangle
		1.5T	1.8T	2.0T	height	carriage	carriage	carriage	front/back
VM Standard wide-view	3000	1500	1800	2000	2002	4041	128	128	6/12
	3300	1500	1800	2000	2152	4341	128	128	
	4000	1500	1800	2000	2552	5041	128	128	6/8
	4500	1350	1600	1750	2802	5541	128	128	6/6
	5000	1200	1450	1500	3052	6041	128	128	3/6
VFM Fullfree duplex	3000	1500	1800	2000	2002	4041	1411	1001	6/12
	3500	1500	1800	2000	2152	4541	1561	1151	
	4000	1500	1800	2000	2552	5041	1961	1551	6/8
VFHM Fullfree triplex	4350	1450	1550	1700	2102	5391	1489	1101	
	4500	1300	1400	1600	2152	5541	1539	1151	
	4700	1180	1200	1400	2217	5741	1604	1216	6/6
	4800	1080	1100	1300	2252	5841	1639	1251	
	5000	1000	1050	1250	2395	6041	1782	1394	
	5400	980	1000	1165	2595	6441	1982	1594	3/6
	5500	950	980	1120	2629	6541	2016	1628	
	6000	850	890	1000	2862	7041	2249	1861	

2.5TMASTSPECIFICATIONS									
		Ratedcapacity		height		free-lifheight			
MastType	Max height	loadcente500mm		closed	heightwith	without	with	masangle	
		2.5T	doubletyres	height	carriage	carriage	carriage	front/back	
VM Standard wide-view	3000	2500		2080	4040	140	140	6/12	
	3300			2230	4340	140	140		
	3500			2330	4540	140	140		
	4000	2300	2500	2630	5040	140	140	6/8	
	4500	1800	2300	2880	5540	140	140	6/6	
	5000	1300	2200	3130	6040	140	140		
	5500	1200	1700	3430	6540	140	140	3/6	
	6000			3680	7040	140	140		
VFM Fullfree	3000	2500		2080	4040	1475	1080	6/12	
	3300			2230	4340	1570	1230		
	3500			2330	4540	1675	1330		
	4000	2300	2500	2630	5040	1975	1630	6/8	
VFHM Fullfree triplex	4500	1800	2300	2880	5540	2225	1880	6/6	
	4000	2300		2005	5040	1375	1005		
	4350	2000	2400	2130	5390	1500	1130		
	4500	1800	2300	2180	5540	1550	1180	6/6	
	4700	1700	2200	2245	5740	1615	1245		
	4800	1700	2200	2280	5840	1650	1280		
	5000	1500	2100	2423	6040	1793	1423	3/6	
	5400	1200	2000	2623	6440	1993	1623		
5500	1100	1800	2657	6540	2027	1657			
	6000	800	1600	2890	7040	2260	1890		

REMARK:
THIS DATA WOULD BE CHANGED UNDER DIFFERENT WORKING CONDITION

MAST SPECIFICATIONS

3.0TMASTSPECIFICATIONS								
		Ratecapacity		height		free-lifheight		
MastType	Max height	loadcenter500mm		closed	heightwith	without	with	masangle
		3T	doubletyres	height	carriage	carriage	carriage	front/back
VM Standard wide-view	3000	3000		2080	4273	145	145	6/12
	3300			2230	4573	145	145	
	3500			2330	4773	145	145	
	4000	2900	3000	2630	5273	145	145	6/8
	4500	2500	2800	2880	5773	145	145	6/6
	5000	2000	2700	3130	6273	145	145	3/6
	5500	/	2400	3430	6773	145	145	
	6000	/	2400	3680	7273	145	145	
VFM Fullree duplex	3000	3000		2080	4273	1422	852	6/12
	3300			2230	4573	1572	1002	
	3500			2330	4773	1672	1102	
	4000	2900	3000	2630	5273	1972	1402	6/8
	4500	2500	2800	2880	5773	2222	1652	6/6
VFHM Fullree triplex	4000	2800		2005	5273	1376	777	6/6
	4350	2600	2900	2130	5623	1501	902	
	4500	2450	2800	2180	5773	1551	952	
	4700	2300	2700	2245	5973	1616	1017	
	4800	2200	2700	2280	6073	1651	1052	
	5000	2000	2600	2423	6273	1794	1195	
	5400	1600	2400	2623	6673	1994	1395	3/6
	5500	1600	2250	2657	6773	2028	1429	
	6000	1100	2100	2890	7273	2261	1662	
	7000	/	2000	/	/	/	/	

3.5TMASTSPECIFICATIONS								
		Ratecapacity		height		free-lifheight		
MastType	Max height	loadcenter500mm		closed	heightwith	without	with	masangle
		3.5T	doubletyres	height	carriage	carriage	carriage	front/back
VM Standard wide-view	3000	3500		2230	4273	145	145	6/12
	3300			2380	4573	145	145	
	3500			2480	4773	145	145	
	4000	3200	3400	2780	5273	145	145	6/8
	4500	2600	3000	3030	5773	145	145	6/6
	5000	2100	2850	3280	6273	145	145	3/6
	5500	/	2400	3580	6773	145	145	
VFM Fullree	3000	3500		2080	4273	1422	952	6/12
	3300			2230	4573	1572	1002	
	3500			2330	4773	1672	1102	
	4000	3200	3400	2630	5273	1972	1402	6/8
	4500	2600	3000	2880	5773	2222	1652	6/6
VFHM Fullree triplex	4000			2005	5273	1376	777	6/6
	4350	3000	3000	2130	5623	1501	902	
	4500	3000	3000	2180	5773	1551	952	
	4700	2500	2900	2245	7273	1616	1017	
	4800	2500	2900	2280	5973	1651	1052	
	5000	2400	2850	2423	6073	1794	1195	
	5400	1750	2500	2623	6273	1994	1395	3/6
	5500	1750	2500	2657	6673	2028	1429	
	6000	1200	2200	2890	7273	2261	1662	
	7000	/	2000	/	/	/	/	

REMARK:
THIS DATA WOULD BE CHANGED UNDER DIFFERENT WORKING CONDITION

GROUP PRODUCTS

